


PM 30.7 115LEE

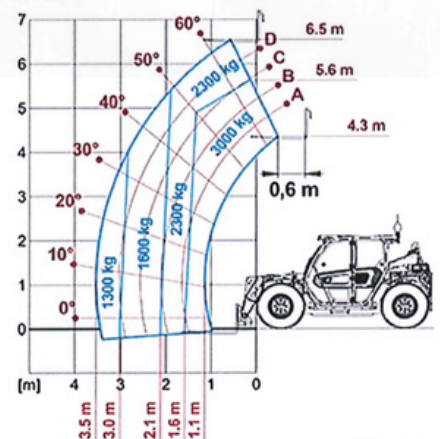

MODEL

PM30.7-115LEE

A - Length (mm)	4310
C - Wheelbase (mm)	2740
F - Ground clearance (mm)	290
H - Width (mm)	2100
M - Cab width (mm)	1010
P - Height (mm)	2120
S - Fork steering range (mm)	4660

MODEL		PM30.7-115LEE
PERFORMANCE		
Unladen weight (kg)		6600
Maximum load capacity (kg)		3000
Lift height (m)		6.5
Maximum reach (m)		3.5
Boom side-shift (mm)		-
Frame levelling (%)		-
Boom section		2
POWERTRAIN		
Engine		DEUTZ TCD 33.6
Range/Cylinders (l)		3.6/4
Engine power (kW/HP)		85/115
Anti-pollution technology		Tier 3
Reversible Fan		●
Maximum speed (km/h)		40
Fuel tank capacity (l)		85
AdBlue tank capacity (l)		-
Hydrostatic transmission EPD		●
Electronic joystick		●
Axles		Axles
Brakes		Brakes
HYDRAULIC		
Delivery/ pressure (bar-l/min)	Hydraulic oil tank	125-210
capacity (l)		85
CABS		
ASCS		Full
FOPS/ROPS Cab		●
Tilting cab		-
CONFIGURATION		
Hydropneumatic Suspension CS Merlo		-
Hydropneumatic Suspension EAS Merlo		-
Permanent four-wheel drive		●
Three steering way		●
Standard tyres		400/70-20"
Hydraulically controlled stabilizers		-
Turret rotation		-
PTO (rpm)		-
3-point rear linkage (kg)		-

- NOT AVAILABLE ● STANDARD ○ OPTIONAL

Your Merlo dealer